


Arm® Architecture

miriac® MPX-LS1043A

Low-power module for
price sensitive communication

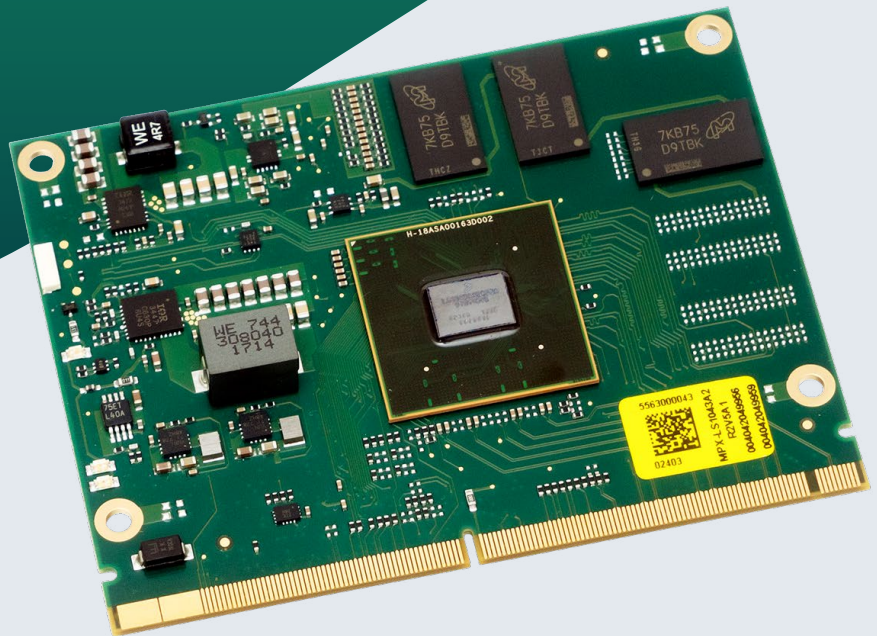

System-On-Modules at a glance

- 4 Arm® Cortex®-A53 64-bit cores at up to 1.6 GHz core frequency
- Up to 4 GB 32-bit DDR4 ECC RAM at 1600 MTps
- All on board supply voltages are monitored by a separate µ-controller.
- Control of on board voltages and the reset logic offer a wide spectrum of custom functionality, even low level safety functions.





Product Description

New cost effective MPX-2 System on Module form factor, connecting to a standard edge connector (MXM3.0 socket). The miriac® MPX-LS1043A SoM is based on the NXP® QorIQ® LS1043A Arm® Cortex® - QorIQ® CPU.



Specifications

CPU

Architecture	Arm® Cortex®-A53
Processor	NXP® QorIQ® LS1043A CPU: 4 Arm® Cortex®-A53 64-bit cores at up to 1.6 GHz core frequency
DRAM	Up to 4 GB 32-bit DDR4 ECC RAM

Memory

Flash	Up to 2 GB SLC NAND Flash & up to 16 MB SPI Flash
Flash Card	SDHC
Boot Flash	QSPI, SD/MMC, NAND Flash
eMMC	8-bit
EEPROM	Yes

Ethernet

10GbE	2x XFI
RGMII	2x
SGMII	4x 1 Gbps, 2x 2.5 Gbps
QSGMII	2x 5 Gbps
TSN / IEEE 1588	Yes

High Speed IO

SerDes lanes	4x at 10 Gbps
USB 3.0	3x
PCIe	3x PCIe Gen2
SATA	1x GEN3

IO

Flex SPI	1x
UART	2x DUART
I²C	2x
GPIOs	Yes
JTAG Debug Interface	Yes

Security / Safety

Security	Security Engine (SEC) SFP, CSU
----------	--------------------------------

Operating Condition

Power Supply Voltage	Single 5 to 12 V DC input supply voltage range
Typical Power Consumption	5 W
Power Management	Yes
RTC	Epson RX-8803LC
Temperature	0 °C to 70 °C
Optional Extended Temperature:	-40 °C to +85 °C



Specifications

Mechanical

Dimensions	62 mm x 82 mm
Connector Type	MPX-2 for MXM3.0 socket



Software / Additional

Software Support	<ul style="list-style-type: none">■ Linux■ VxWorks (on request)■ Others (on request)
Additional	<ul style="list-style-type: none">■ Compatible variants available with QorIQ LS1023A, LS1046A, LS1048A, LS1088A■ Temperature sensor■ Dev Kit available for immediate start, includes power supply, cables. Linux on SD card

General note:

Our standard product versions offer what we consider to be the optimum configuration in terms of performance, price, usage and TDP. The product features lists specify the maximum range of functions per interface. However, not all interfaces or functions are always available in parallel. Flexible SERDES multiplexing is one of the reasons for this. In addition, we provide multiple memory expansion options and are also happy to accommodate specific customer wishes. So do not hesitate to contact us directly to discuss your desired configuration.

Block diagram

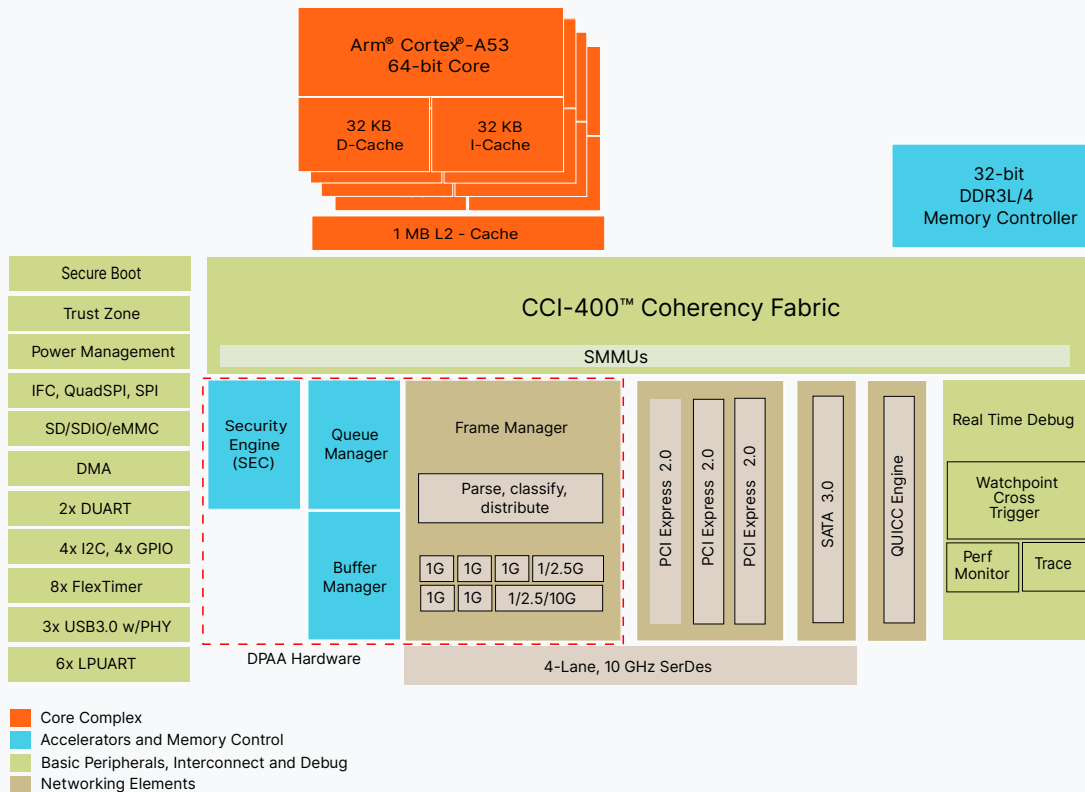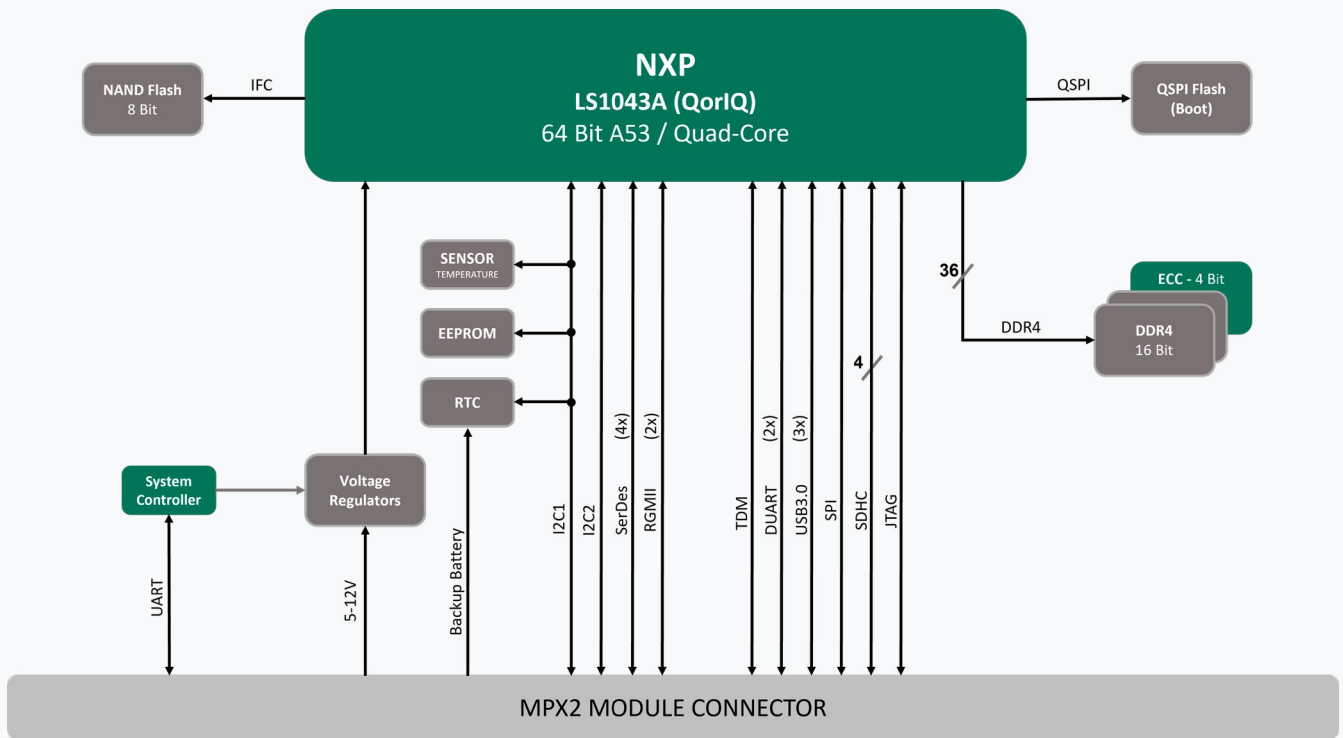



Order Information

Name	Code	Description	Status
miriac® MPX-LS1043A SoM	855605	4 Arm® Cortex®-A53, 1.0 GHz, 2 GB DDR4 w ECC, 16 MB NOR Flash, 512 MB NAND Flash, 0 °C to 70 °C, w/o SEC	active
Development Kit basic for miriac® MPX-LS1043A2	855914	4 Arm® Cortex®-A53, 1.0 GHz, 2 GB DDR4 w ECC, 16 MB NOR Flash, 512 MB NAND Flash, 0 °C to 70 °C, w/o SEC	active
Development Kit pro for miriac® MPX-LS1043A2	856410	4 Arm® Cortex®-A53, 1.0 GHz, 2 GB DDR4 w ECC, 16 MB NOR Flash, 512 MB NAND Flash, 0 °C to 70 °C, w/o SEC	active



Related Products

Name	Code	Description	Status
miriac® SBC-LS1043A	854201	Single Board Computer based on NXP® QorIQ® LS1043A	active



Mühlweg 1
82054 Sauerlach
Germany

Sales: +49 8104 801-130
E-Mail: info@microsys.de
www.microsys.de

